


# Ribbon V




colour included  
in the price

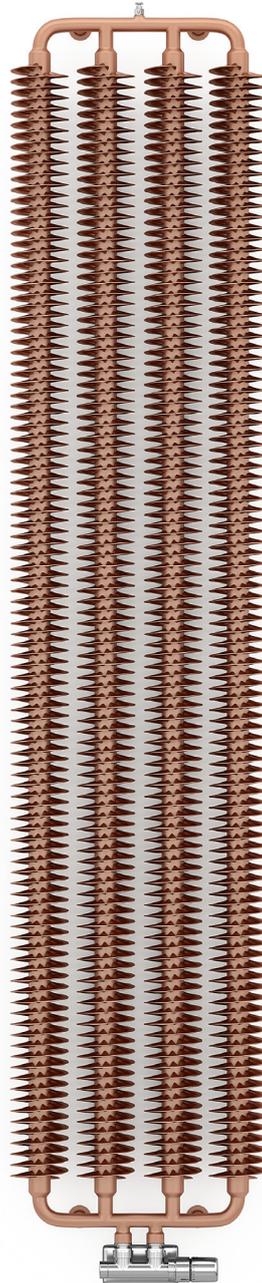

**Ribbon V** 1920 $\updownarrow$  × 390 $\leftrightarrow$  ZX  
colour: Copper

Angled integrated thermostatic valve set, left, chrome  
Integrated pipe-masking set, chrome

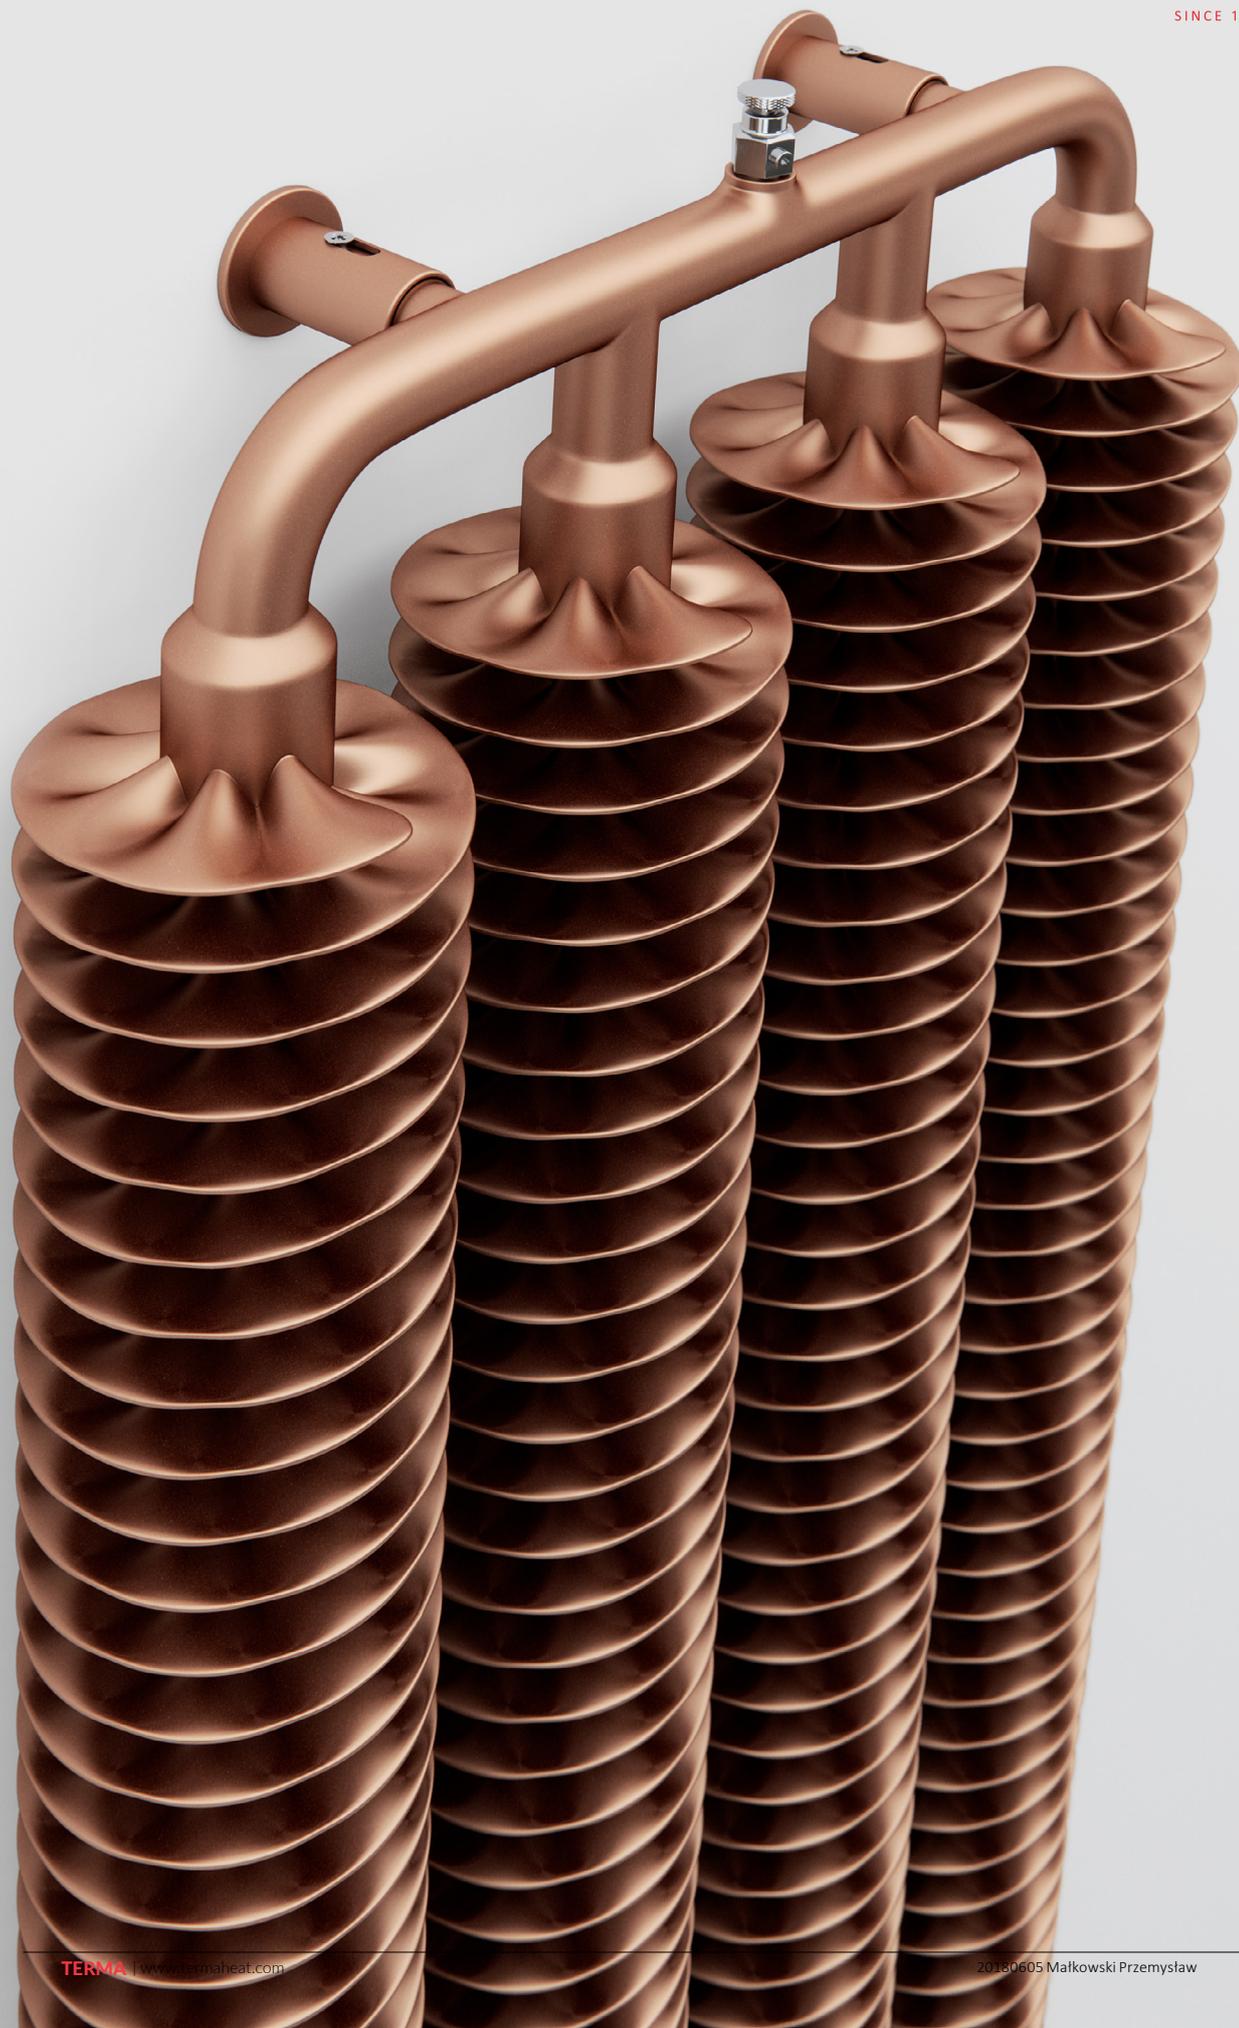

# Ribbon V




colour included  
in the price

Design: Przemysław Jan Majchrzak


## Standard connection:




## Available sizes:

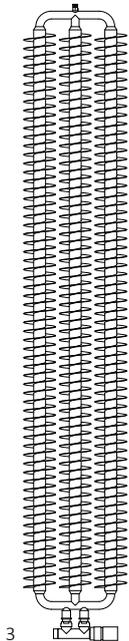


3  
1720 x 290  
↓ ↔

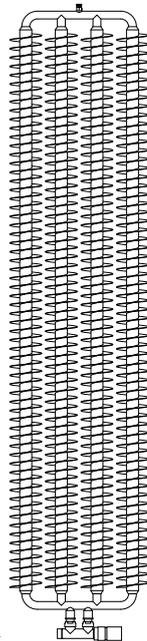

4  
1720 x 390

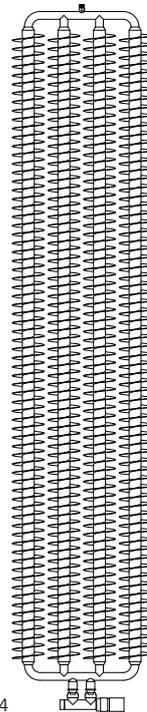

4  
1920 x 390

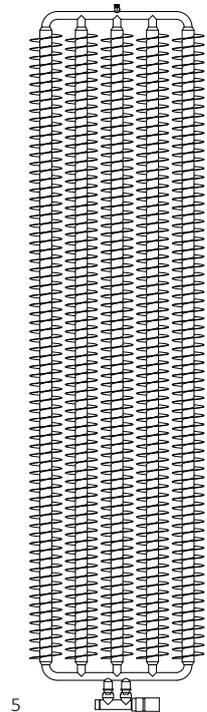

5  
1920 x 490

## Specification:

Working pressure: 1000 kPa    Maximum operating temperature: 95°C

| A ↓<br>[mm] | B ↔<br>[mm] | C1<br>[mm] | 75/65/20°C<br>[W] | 55/45/20°C<br>[W] | D<br>[mm] | E<br>[mm] | F<br>[mm] | U<br>[dm³] | W<br>[kg] | Product code<br><small>Configuration code p. 5</small> |
|-------------|-------------|------------|-------------------|-------------------|-----------|-----------|-----------|------------|-----------|--|
| 1720        | 290         | 50         | 660               | 330               | 80        | 1672      | 36        | 3,14       | 26,65     | WGRIB172029  |
| 1720        | 390         | 50         | 872               | 436               | 180       | 1672      | 36        | 4,10       | 35,16     | WGRIB172039  |
| 1920        | 390         | 50         | 989               | 499               | 180       | 1872      | 36        | 4,59       | 39,37     | WGRIB192039  |
| 1920        | 490         | 50         | 1240              | 626               | 280       | 1872      | 36        | 5,66       | 48,92     | WGRIB192049  |


# Ribbon V



colour included  
in the price


## Technical drawing:

ZX

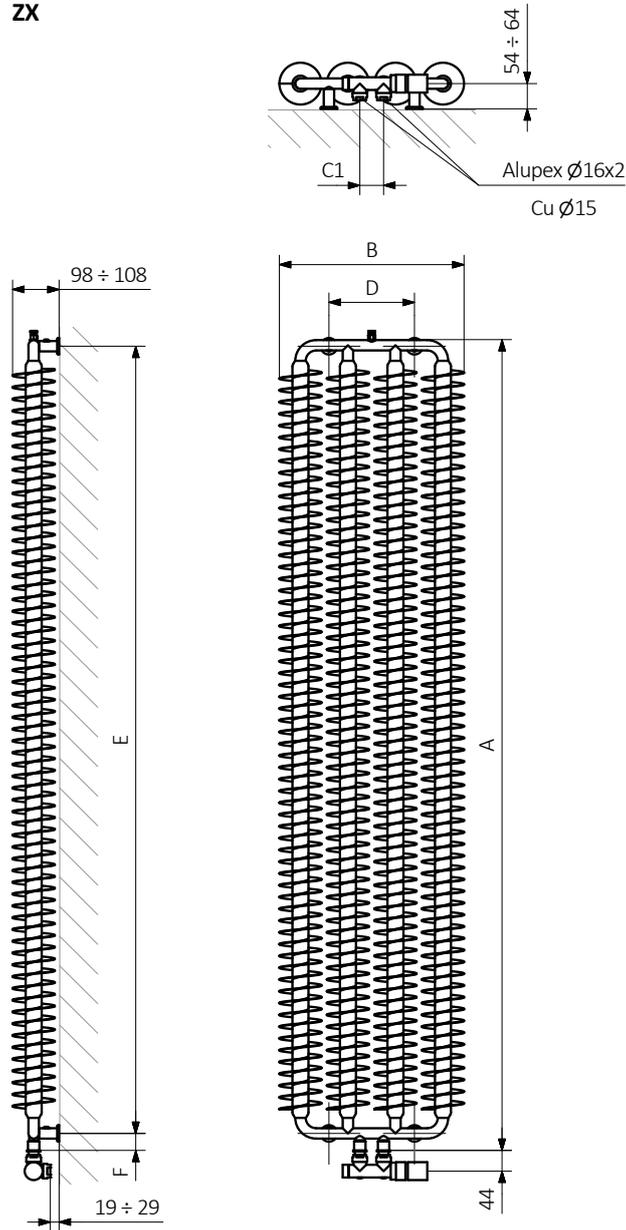


A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres  
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:



Pipe:





colour included  
in the price

In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

## The construction of a water and dual fuel radiator product and configuration code:

WGRIB172029

K916SX


PRODUCT CODE

(located in the table for the product)

CONFIGURATION CODE

(supplemented by hand)

### Example Configuration

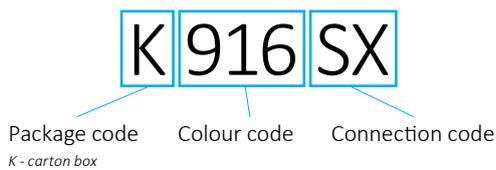

## Epoxy primer

**E** – Code of epoxy primer is an extra processes.

WGSDW151050 K916SX **E** — Extra processes or additions code

# Ribbon V



## Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional p Colour included ayment for a color.